

SPIROBANK II ADVANCED™

Handheld, Stand-alone and
PC-based Spirometer, with
Oximetry Option

A complete Spirometer and Oximeter,
designed for all respiratory therapists.



MAIN features



REAL-TIME TEST

Spirometry: FVC, VC, IVC, MVV, PRE/POST
Bronchodilator comparison
Oximetry (optional): Spot test (SpO₂, BPM)



CARRY EVERYWHERE

High resolution backlight display, long battery life, large internal storage, carrying case included



COMPLIANCE ATS/ERS 2019

And other Standards including ISO 26782 (for Spirometry), ISO 23747 (for PEF), ISO 80601-2-61 (for Oximetry), and more. CE0476, FDA 510 (k)



PC CONNECTION AVAILABLE

Real-time test on PC screen, connect with your EHR/EMR, back-up internal memory and more, via USB and Bluetooth



DISTINCTIVE features



PREDICTED SETS & VALUES

Large Selection, including comparison %Pred, Z-score and LLN. Include GLI in PC-mode



OXIMETRY OPTION

Spot test in Real-Time and 6MWT, Sleep Test, 24h Holter in PC-mode (calculated)



EHR/EMR CONNECTIVITY

Via PC, integration with patient database on your EHR/EMR (in HL7, GDT)



COVID-19 PREVENTION

Complete Disposable Set with Antiviral filter. Bluetooth connection to test at safety distance

Always INCLUDED


- ✎ Carrying case
- ✎ USB cable
- ✎ Noseclip
- ✎ PC Software license

With Oximetry Option:

- ✎ Finger Probe

Compatible SOFTWARE

winspiroPRO

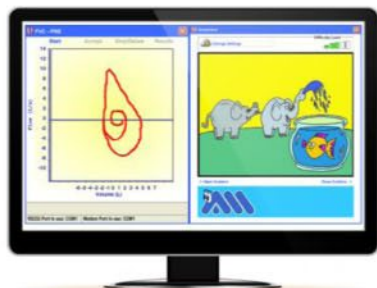

Pediatric Incentive (PATENTED) to improve patient compliance during the test.

Acceptability Messages, Test interpretation and Quality Control Grade according to the latest Spirometry Standards

MAIN FEATURES

Windows-based solution for Spirometry, Oximetry and Telemedicine.


Wide range of predicted sets and values, including GLI Predicted sets, LLN and Z-score.

Embedded EHR/EMR connectivity.

NET VERSION available, share one database between different PC workstations.

MEDICAL REPORT

Specialized and customizable printout

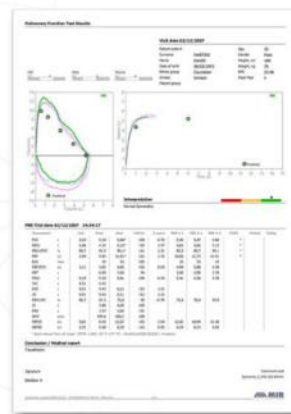

spiro Connect



MAIN FEATURES

Windows-based solution, direct integration with your EHR/EMR.

Real time test include Spirometry and Oximetry Standardized communication in HL7 or Exchange Protocol.

Select patient info directly from your own EHR/EMR

Spirometry test: FVC-Pre, FVC-Post, VC-Pre
Oximetry Test: SpO2 (%), Pulse (BPM)

GO-TO-MARKET TOOLKIT

Software Development Kit available for System Integrators and App Developers.
OEM service available for Spirometry and Oximetry.

Learn more about available SDK and OEM

Compatible TURBINES

flowMIR™
Disposable Turbine



Reusable Turbine



	Mouthpiece	Turbine Disinfection	Turbine Calibration	Packaging	Antiviral Filter
flowMIR™ Disposable Turbine	Included Disposable	Not required	Not required	Individually sealed: 60 or 10 units / box	Available Disposable
Reusable Turbine	Required, Not Included	Required	Required	1 unit in Carton box	Required Disposable

Also available in MORE CONFIGURATIONS



Technical Specification

Spirobank II Advanced

Spirobank II Smart

Spirobank II Basic

TYPE OF SPIROMETER	StandAlone + PC, with Oximetry Option	StandAlone + PC + App, with Oximetry Option	StandAlone + PC
COMPATIBLE TURBINES	flowMIR™ Disposable Turbine, Reusable Turbine Flowmeter	flowMIR™ Disposable Turbine, Reusable Turbine Flowmeter	flowMIR™ Disposable Turbine, Reusable Turbine Flowmeter
COMPATIBLE SOFTWARES	Wnspiro PRO, spiro Connect	MIR Spiro App, Wnspiro PRO, spiro Connect	Wnspiro PRO, spiro Connect
EXTERNAL CONTROL	Real-Time test on PC screen, connect with your EHR/EMR, back-up internal memory, and much more Connect to your PC via USB and Bluetooth 2.0	Real-Time test on Tablet screen and PC screen, connect with your EHR/EMR, back-up internal memory, and much more Connect to your PC via USB (no Bluetooth) Connect to your Tablet via Bluetooth Smart BLE 4.0	Real-Time test on PC screen, connect with your EHR/EMR, back-up internal memory and much more Connect to your PC via USB
EHR CONNECTIVITY	Via PC, integration with patient database on your EHR/EMR (in HL7, GDT)	Via PC: integration with patient database on your EHR/EMR (in HL7, GDT) Via APP: transfer data to a remote server in HL7 standards	Via PC, integration with patient database on your EHR/EMR (in HL7, GDT)
MEASURED PARAMETERS	<p>Spirometry: FVC, VC, IVC, MWV, PRE-POST Bronchodilator comparison Oximetry (optional): Spot test (SpO2, BPM)</p> <p>Spirometry: FVC, FEV1, FEV1/FVC%, DTPEF, FEV 0.5, FEV0.5/FVC%, FEV0.75, FEV0.75/FVC%, FEV2, FEV2/FVC%, FEV3, FEV3/FVC%, FEV6, FEV1/FEV6%, PEF, FEF25%, FEF50%, FEF75%, FEF25-75%, FEF75-85%, FET, Vext, ELA, EVOL, FIVC, FIV1, PIF, FIV1/FIVC%, FIF25%, FIF50%, FIF75%, R50, PIF, IRV, VC, IVC, IC, ERV, FEV1/VC%, TV, VE, RR, ti, te, ti/t-tot, TV/ti, MVV</p> <p>Oximetry (Optional): SpO2% (min, max, average), BPM (min, max, average), Test duration, % Bradycardia Duration (<40 BPM), % Tachycardia Duration (>120 BPM), % of Time with SpO2 ≤ 90% (T90%, T89%)</p>	<p>Spirometry: FVC, VC, IVC, MWV, PRE-POST Bronchodilator comparison Oximetry (optional): Spot test (SpO2, BPM)</p> <p>Spirometry: FVC, FEV1, FEV1/FVC%, DTPEF, FEV 0.5, FEV0.5/FVC%, FEV0.75, FEV0.75/FVC%, FEV2, FEV2/FVC%, FEV3, FEV3/FVC%, FEV6, FEV1/FEV6%, PEF, FEF25, FEF50, FEF75, FEF25-75, FEF75-85%, FET, Vext, ELA, EVOL, FIVC, FIV1, PIF, FIV1/FIVC%, FIF25, FIF50, FIF75, R50, PIF, IRV, VC, IVC, IC, ERV, FEV1/VC%, TV, VE, RR, ti, te, ti/t-tot, TV/ti, MVV</p> <p>Oximetry (Optional): SpO2% (min, max, average), BPM (min, max, average), Test duration, % Bradycardia Duration (<40 BPM), % Tachycardia Duration (>120 BPM), % of Time with SpO2 ≤ 90% (T90%, T89%)</p> <p>on MIR Spiro App: Spirometry: FVC, VC, PRE/POST Bronchodilator comparison Parameters: FVC, FEV1, FEV1%, PEF, FEF25-75, FET, Lung Age, VC, IVC Oximetry (Optional): %SpO2 [Baseline, Min, Max, Mean], Pulse Rate [Baseline, Min, Max, Mean] Events.</p>	<p>Spirometry: FVC, VC, IVC, PRE/POST Bronchodilator comparison</p> <p>Spirometry: FVC, VC, IVC, IC, ERV, FEV1, FEV1%, PEF, FEF 25-75, FET, EVOL, ELA</p>

TECHNICAL datasheet

PRODUCT CODES- Spirobank II Advanced Configurations


911020E0 - Spirometer • 911020E1 - Spirometer with reusable turbine

911025E0 - Spirometer + Oximeter • 911025E1 - Spirometer + Oximeter with reusable turbine

Technical specification

Width	55 mm
Length	160 mm
Thickness	25 mm
Weight	140 g (battery pack included)

Turbine

 Reusable turbine (code 910002)

 Disposable turbine (code 910004)

Power supply	Rechargeable Lithium-I on 3.7V, 1100 mAh
Current capacity	1100 mAh
Consumption	~20-30 mA (during test)
Backup battery voltage	none
Batteries charger	voltage=5 V DC, current=minimum 500 mA, input current= 100VAC - 240 VAC

Autonomy	50 hours
Connectivity	USB 2.0, Bluetooth®2.1
Display	LCD monochrome, 160 × 80 pixel
Keyboard	membrane keyboard with 6 keys
Mouthpieces	Ø 30 mm (1.18 inch)
Type of electrical protection	Internally powered

Safety level for shock hazard	Type BF Apparatus
Conditions of use	Apparatus for continuous use

Conditions of storage	Temperature:	MIN -20 °C, MAX + 60 °C
	Humidity:	MIN 10% RH; MAX 95% RH

Operating Conditions	Temperature:	MIN + 10 °C, MAX + 40 °C
	Humidity:	MIN 10% RH, MAX 95% RH

Applied norms	Electrical Safety Standard	EN 60601-1
	Electro Magnetic Compatibility	EN 60601-1-2

Spirometry

Flow sensor	bi-directional digital turbine
Flow range	±16L/s
Volume accuracy	±2.5% or 50 mL
Flow accuracy	±5% or 200 mL/s
Dynamic resistance	<0.5 cm H ₂ O/L/s
Temperature sensor	semiconductor (0-45 °C)
Test available	FVC, VC, IVC, MVV, PRE-POST FVC, FEV1, FEV1/FVC%, DTPEF, FEV0.5, FEV0.5/FVC%, FEV0.75, FEV0.75/FVC%, FEV2, FEV2/FVC%, FEV3, FEV3/FVC%, FEV6, FEV1/FEV6%, PEF, FEF25%, FEF50%, FEF75%, FEF25-75%, FEF75-85%, FET, Vext, ELA, EVOL, FIVC, FIV1, PIF, FIV1/FIVC%, FIF25%, FIF50%, FIF75%, R50, PIF, IRV, VC, IVC, IC, ERV, FEV1/VC%, TV, VE, RR, ti, te, ti/t-tot, TV/ti, MVV
Measured parameters	Up to 10000 tests

Memory capacity

Oximetry (on request)

Measurement method	Red and infrared absorption
SpO2 range	0-99%
SpO2 accuracy	± 2% between 70-99% SpO2
Average number of heart beats for the %SpO2 calculation	8 beats
Pulse Rate range	18-300 BPM
Pulse Rate accuracy	± 2BPM or 2% whichever is greater
Average interval for the calculation of cardiac pulse	8 seconds
Signal quality indication	0 - 8 segments on display
Test available	spot
Measured parameters	SpO2% min, max, average BPM min, max, average Test duration % Bradycardia Duration (<40 BPM) % Tachycardia Duration (>120 BPM) % of Time with SpO2 ≤ 90% (T90%, T89%)
Memory capacity	up to 300 hours oximetry

Certificates & Registrations

CE 0476	MED 9826
FDA 510 (k)	K 061712
Health Canada	71191 (class II), 75535 (class III)
CND code	Z12150102 (spiro) Z1203020408 (spiro + oxy)
GMDN code	46906 (spiro), 45607 (spiro + oxy)
Ministry of Health	1038066/R (spirometer) 1038086/R (spirometer + oximeter)